


Smart-Node

Power and communication solution for video surveillance

Simplifying CCTV deployments while reducing total costs


RADWIN Smart-Node is an all-in-one, multi-power and communication managed solution for video surveillance deployments. Eliminating the need to build costly communication cabinets from scratch, Smart-Node comes ready-to-install and supports a variety of power and networking interfaces for CCTV cameras, speakers, radios, infra-red projectors and other third-party devices.

RADWIN Smart-Node is a remarkably compact, IP-67 grade solution that guarantees low visual impact for street-level deployments and ensures high reliability in extreme environments.

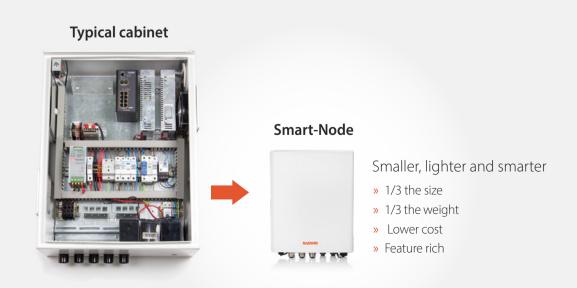

All-in-One Power and Communication

Internal space for 3rd party devices

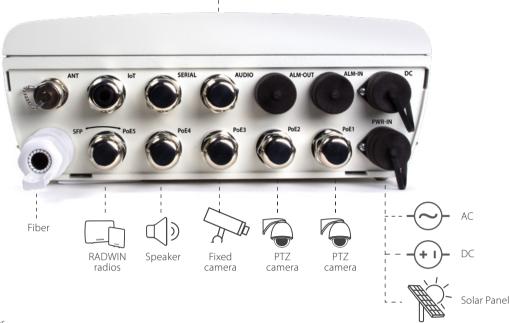

^{*} Device connectivity examples

Smart-Node main benefits:

- » Reduced site costs
- » No labor costs for design and assembly
- » Greater flexibility due to a wide array of power and communication options for various devices
- » Rapid and simple installations
- **» Unified management system** for remote monitoring & control
- » Low maintenance due to robustness and high reliability

Highlights

Versatile power options

Input power options

- AC: 100-240 VAC
- DC: 40-57 VDC

Output power options

- PoE, PoE+ (15W/30W/60W)
- Passive PoE (24V/56V)
- DC-OUT (12V/24V)

Versatile communication options

GbE switch

- 5-Port Gigabit PoE switch
- SFP Gigabit port

Wired and wireless

- Fiber SFP
- Copper LAN
- Wireless broadband (external)

Unified power & networking management

- Remote power and networking management
- Switch PoE assignment per port (802.3 af, at, at+[60W], 24V/56V)
- Lithium-ion battery backup (UPS) monitoring
- Graceful power degradation by priority

RADWIN

RADWIN Ltd Corporate Headquarters

+972.3.766.2900 | sales@radwin.com